
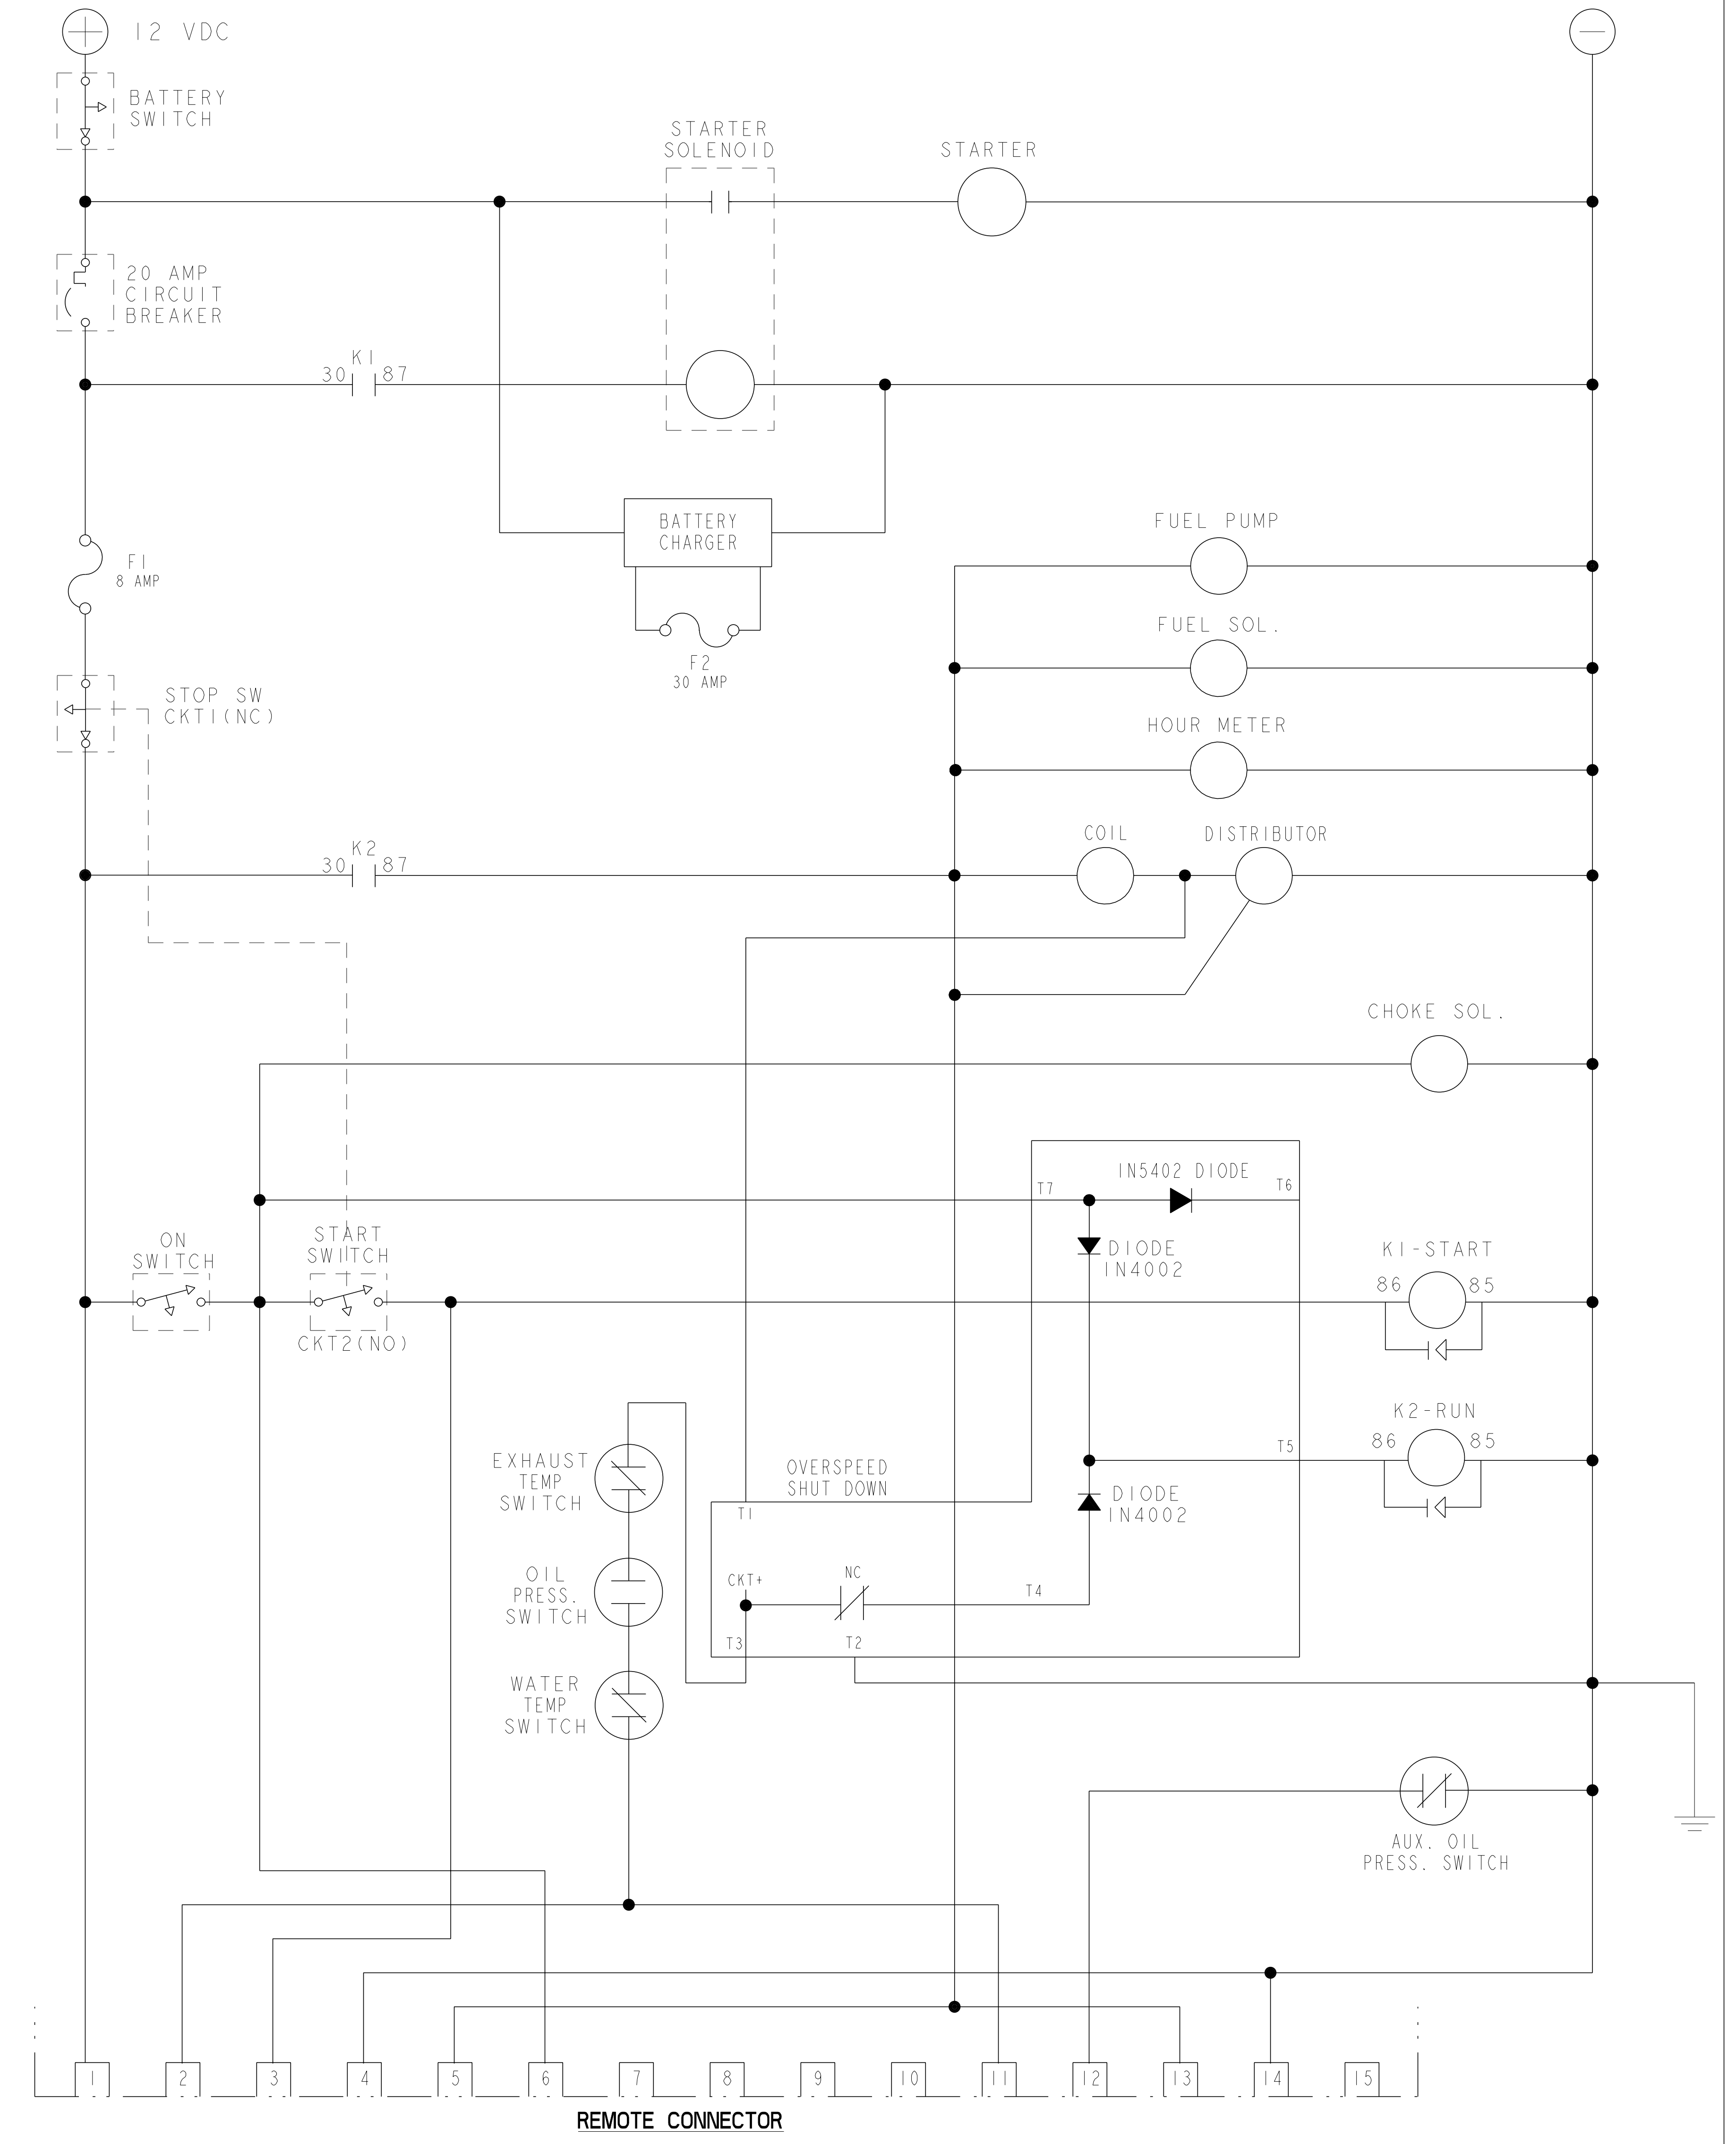


ECO NO.	DATE	REV.	REVISION RECORD	AUTH.	DR. BY
4065	4/20/99	A	REVERSED CIRCUIT #1 AND CIRCUIT #2 ON START/STOP SWITCH	JEC	JEC
5054	10/16/01	B	ADDED WIRE DESCRIPTION FROM BATTERY CHARGER TO 20A CIRCUIT BREAKER	JRS	JRS

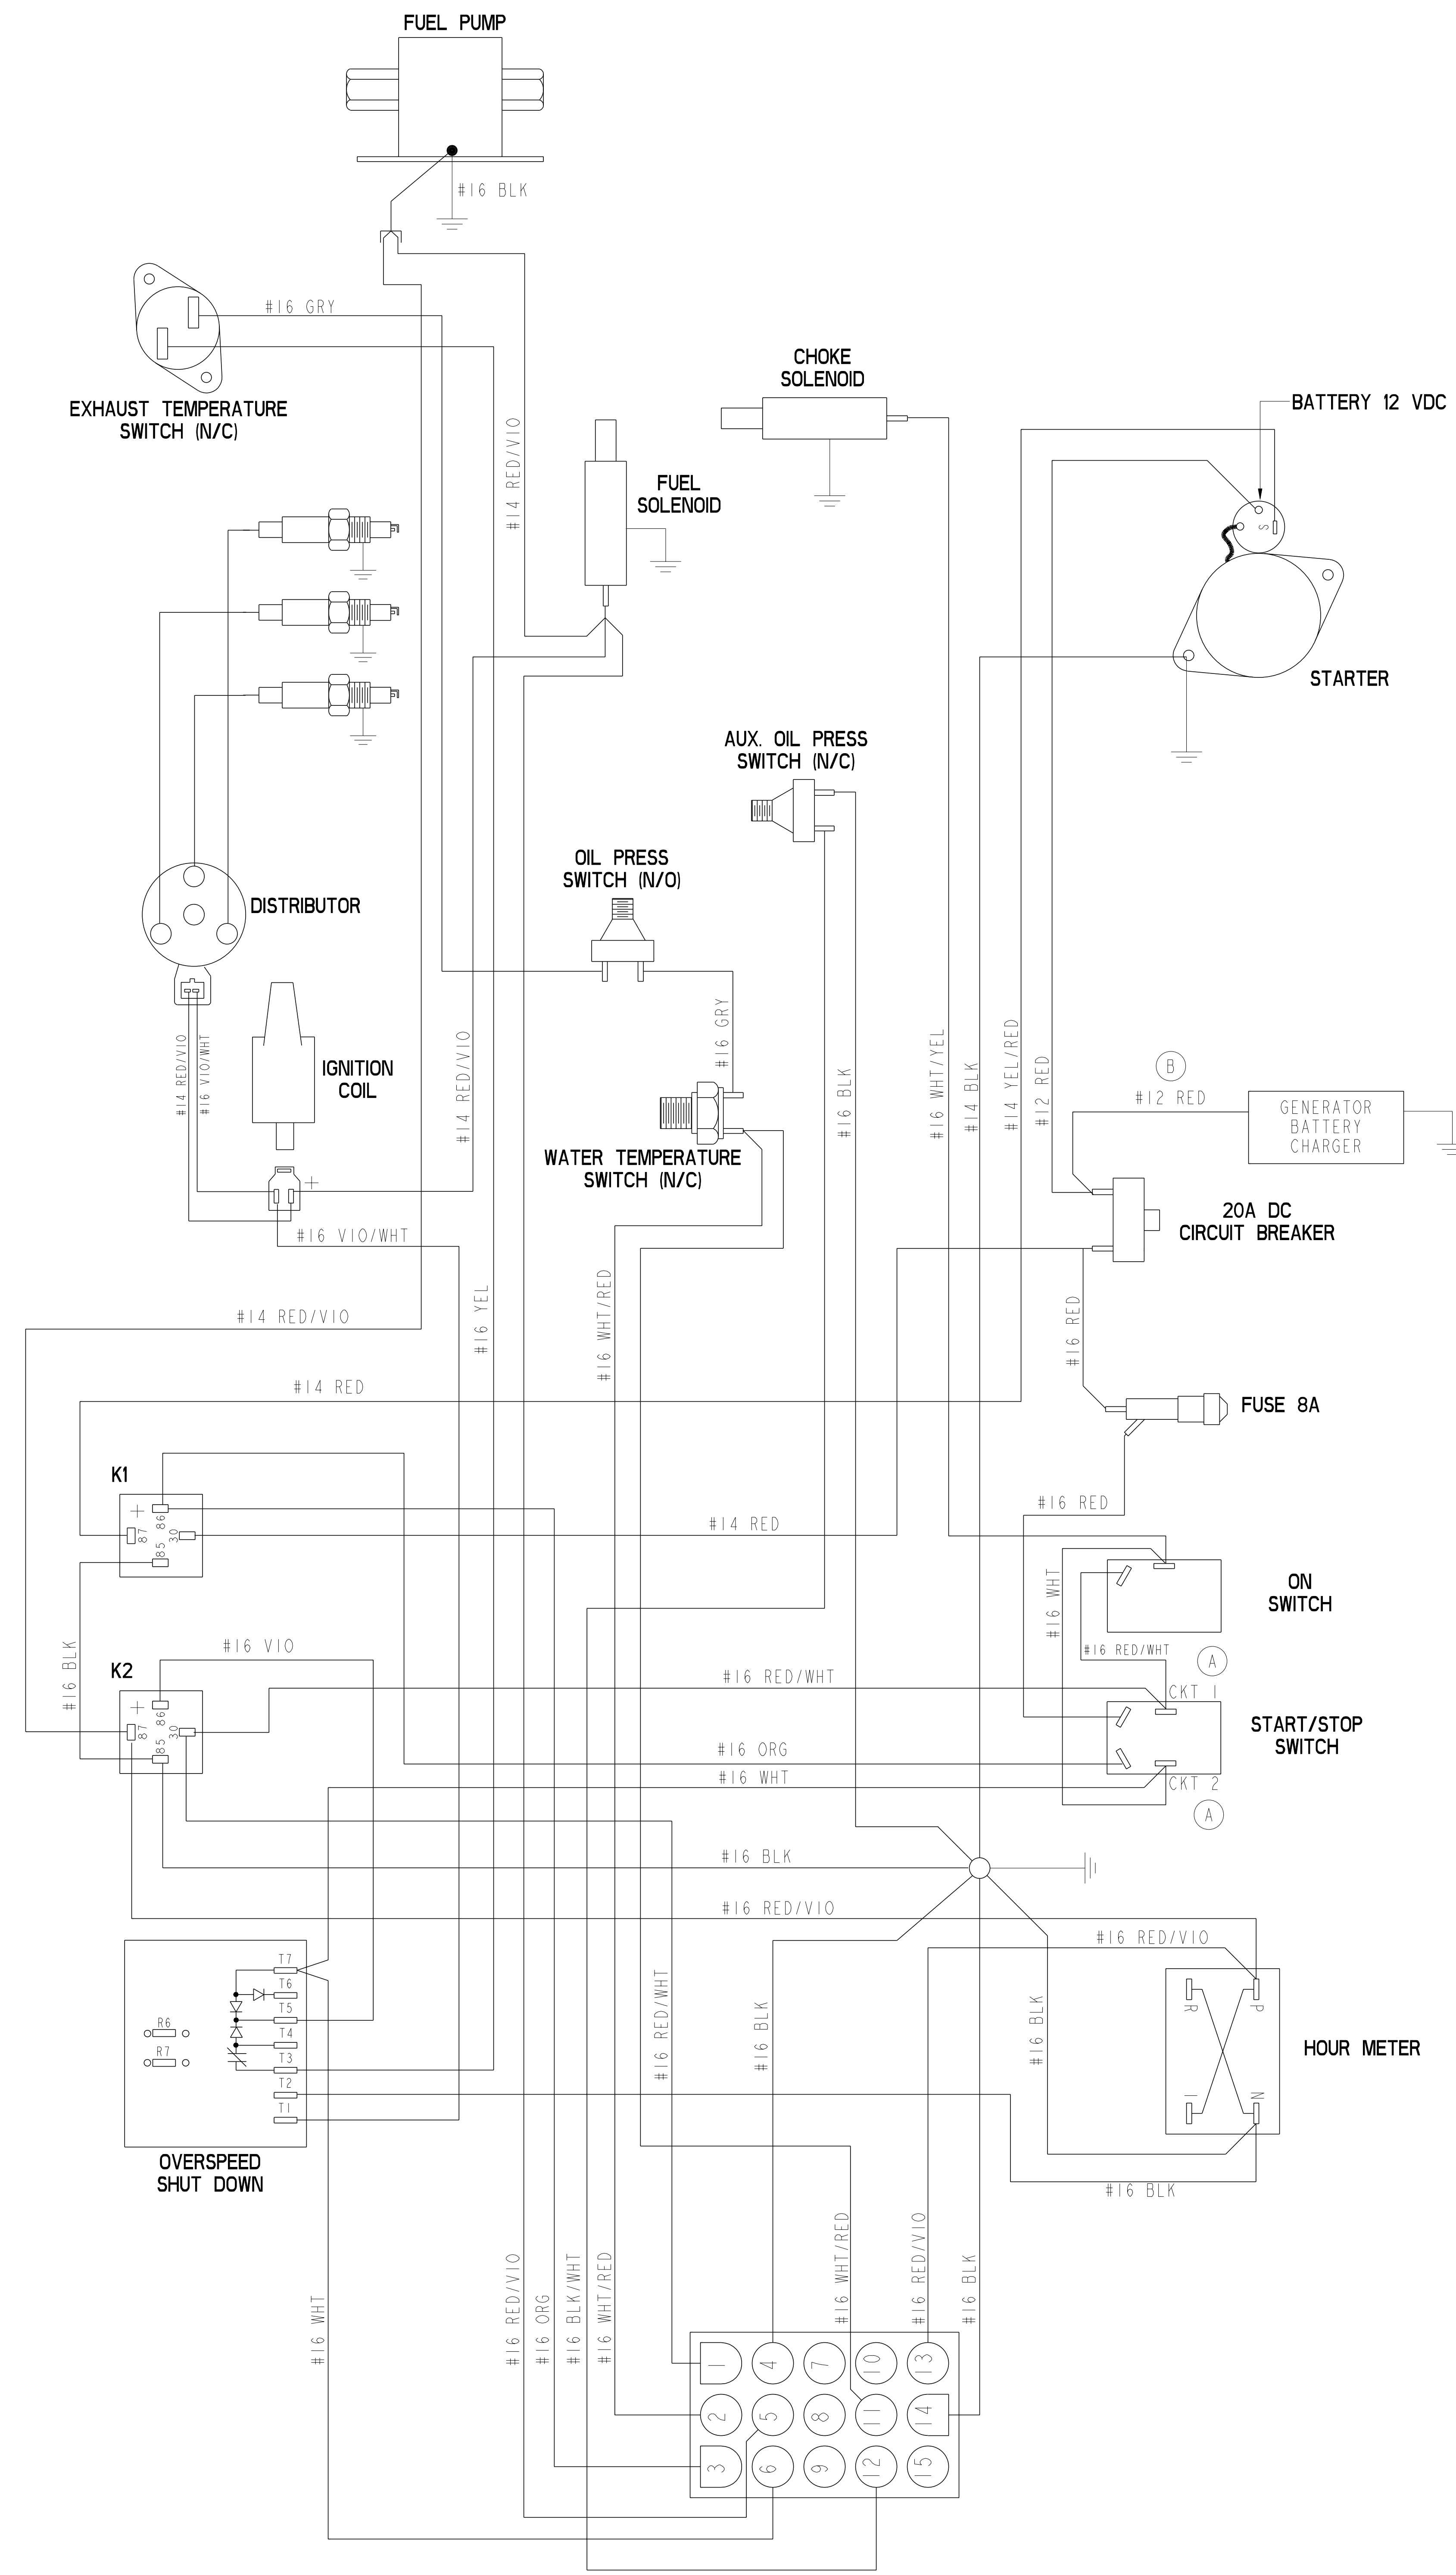

NOTES:
 1. ALL WIRE #16AWG(105DEG C 600V-ALPHA# 1858/19-MIL-W-16878D TYPE B) UNLESS SPECIFIED OTHERWISE.
 2. WARNING - RELAYS K1, K2 HAVE INTERNAL DIODES ACROSS THEIR COILS, POLARITY AS INDICATED MUST BE MAINTAINED TO AVOID DAMAGE TO THE RELAYS.

TOLERANCES (UNLESS OTHERWISE NOTED)		WESTERBEKE CORPORATION AVON MA. 02322	
INCHES	MILLIMETERS	TITLE	
.XX	.02	WIRING DIAGRAM 4.5, 7.0 BCGB	
.XXX	.005	DRAWN BY	JEC
CST	.03	DATE	10/01/01
ANGLES	.5°	APPROVED BY	JEC
FINISH		DATE	
DIMENSIONS		SCALE	NONE
INCHES		SIZE	DRAWING NUMBER
MILLIMETERS		E 43864	
(WHEN APPLICABLE)		SHT.	1 of 1